


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
1			
2			
3			

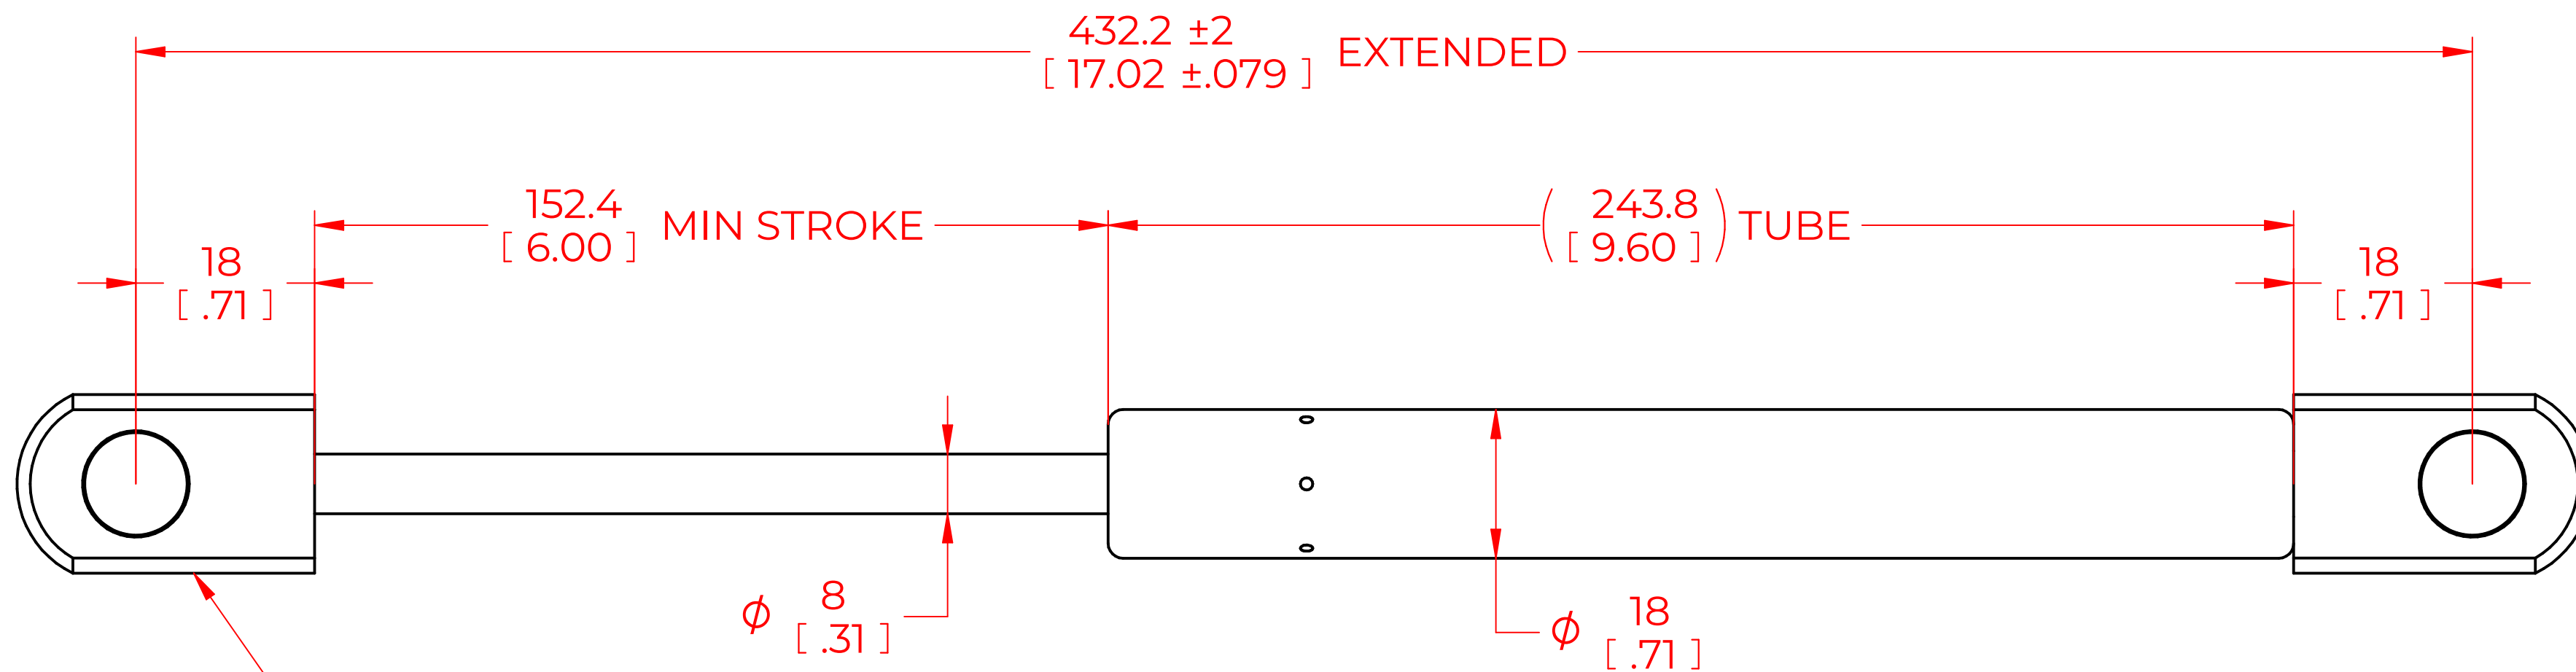

FB2
EYELET METAL CONNECTOR
M6 THREAD
HOLE ϕ 10.35MM \pm 0.06
10MM THICKNESS
TYP

DAMPENING SPECS		
DAMPENING TYPE	SPEED (40LBS OF LOAD)	MAX FORCE
LIGHT/ EXTENSION	3.8 "/s 96.52 mm/s	40 LBS / 178 N

- NOTES:
- 1) MATERIAL: CYLINDER - HEAVY GAUGE STEEL, BLACK PAINT. ROD - HARDENED STEEL BLACK NITRIDE.
 - 2) DIMENSIONS ASSUMING END CONNECTORS ARE FULLY FASTENED.
 - 3) DRAWING LENGTHS (NOT DIMENSIONED) OF CYLINDER AND ROD BODIES ARE NOT TO SCALE.
 - 4) OPERATING TEMPERATURE: -30°C TO +80°C.
 - 5) STANDARD LABEL TO INCLUDE PART NUMBER, DATE CODE AND WARNING MESSAGE. LABEL NOT TO BE REMOVED.
 - 6) DAMPER NOT TO BE CHANGED OR MODIFIED FROM ITS ORIGINAL MANUFACTURED INTENT.
 - 7) DAMPER IS SUGGESTED TO BE MOUNTED SHAFT DOWN (ROD DOWN) FOR MAXIMUM PERFORMANCE.
 - 8) IF APPLICABLE, CONNECTORS TO BE ORIENTED AS SHOWN \pm 5°.
 - 9) DAMPER WILL BE INDIVIDUALLY PACKED IN SEALED AND CLEAR PLASTIC BAGS TO AVOID DAMAGE, DUST, OR OTHER FOREIGN OBJECTS.
 - 10) DAMPER TO BE ASSEMBLED WITH END FITTINGS COMPLETELY FASTENED.
 - 11) DAMPERS ARE NOT TO BE OPENED.
 - 12) IF APPLICABLE, GREASE TO BE INCLUDED INSIDE THE BALL SOCKET OF THE END FITTINGS.

NORMONT	NAME	DATE
	DRAWN DMA	11/26/2024
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF NORMONT THIS DOCUMENT CONTAINS CONFIDENTIAL PROPRIETARY INFORMATION. THE REPRODUCTION, DISTRIBUTION, UTILISATION OR THE COMMUNICATION OF THIS DOCUMENT OR ANY PART THEREOF, WITHOUT EXPRESS AUTHORISATION IS STRICTLY FORBIDDEN.	CHECKED	
	PART No. NSDEL-6M-FB2	REV
	TITLE LIGHT DAMPENING EXTENSION DAMPER	
	TOLERANCES	SCALE
REMOVE ALL BURRS AND BREAK ALL SHARP EDGES	X.X \pm 0.060	THIRD ANGLE PROJECTION
ALL DIMENSIONS ARE DUAL UNLESS OTHERWISE SPECIFIED	X.XX \pm 0.030	
	X.XXX \pm 0.010	
	ANGLES \pm 1°	SIZE
HOLES \pm 0.005	SHEET 1 OF 1	C