REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED

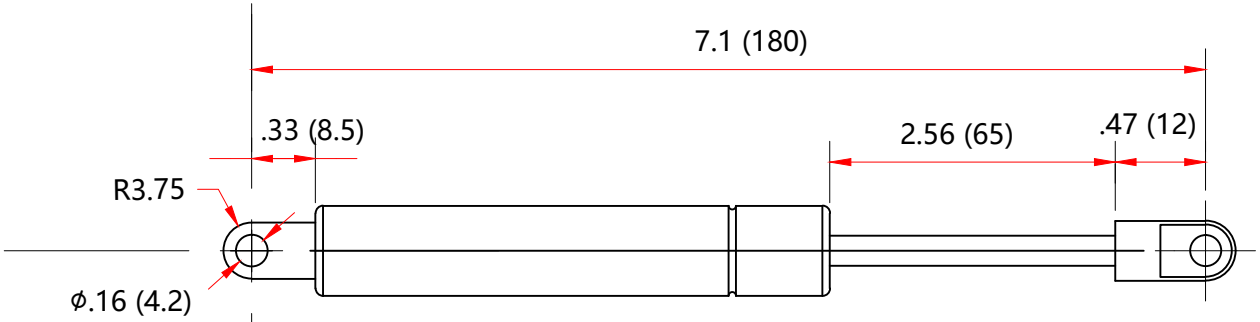

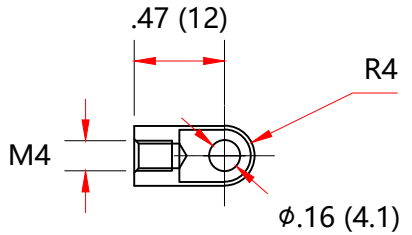

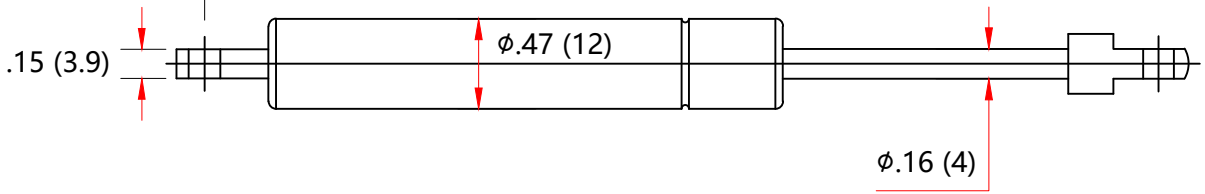



NOTES
1 . MATERIAL : CYLINDER - HEAVY GAUGE STEEL, BLACK PAINTING, ROD - HARDENED STEEL BLACK NITRIDE
2 . FORCE: 15LBS/ 67N
3 . Dimensions assuming end connectors are fully screwed into place
4 . Drawing lengths (not dimensioned) of cylinder and rod bodies are not to scale
5 . Operating temperature: - 30ÁC TO + 80ÁC
6 . Label to include part number, date code, and warning message. Label not to be remove
7 . Gas Spring not to be modified, or changed from manufactured, original, product
8 . Gas Spring is suggested to be mounted shaft down (rod down) for maximum performance
9 . Connectors to be lined up per drawing. 5 degree division permitted
1 0 . Gas Springs will be individually packed in sealed clear plastic bags, to avoid damage, dust, or other foreign material - objects
1 1 . Gas Spring to be assembled per the drawing with end fittings assembled / fastened
1 2 . Gas Springs are not to be opened
1 3 . Inside of each end fitting to be greased

NORMONT

	NAME	DATE
DRAWN	Faith	1/20/23
CHECKED		

DWG NO NSM710A15E
REV 0

TITLE Gas Spring

TOLERANCES	
X.X	± 0.060
X.XX	± 0.030
X.XXX	± 0.015
ANGLES	± 1.0Á
HOLES	± 0.005

THIRD ANGLE PROJECTION

SCALE N.T.S.

SIZE B

SHEET 1 OF 1

REMOVE ALL BURRS & BREAK ALL SHARP EDGES

ALL DIMENSIONS ARE IN inch UNLESS OTHERWISE SPECIFIED