


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED

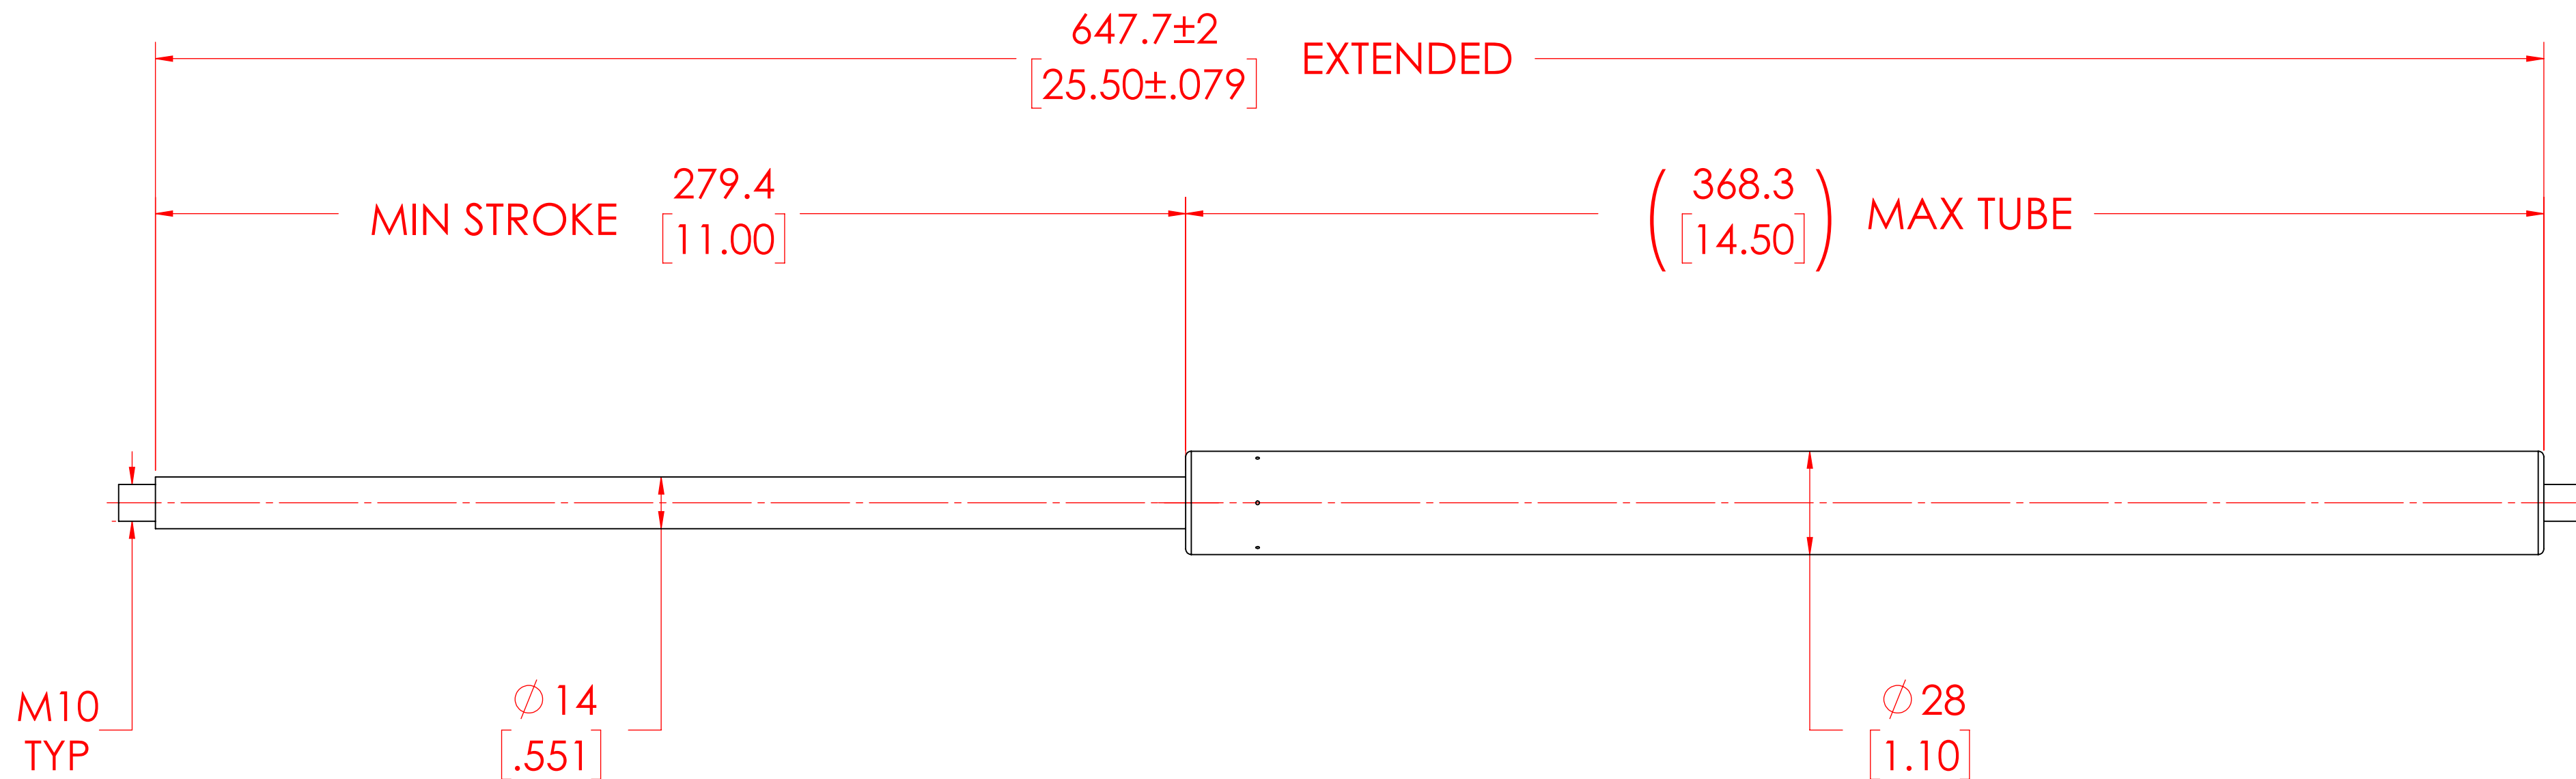

FORCES (STATICALLY MEASURED)	
F1	F2
350 LBS (1557 N) ^{+5%} / _{-5%}	-

NOTES:

- 1) MATERIAL: CYLINDER - STAINLESS STEEL 316, NO PAINT / ROD - STAINLESS STEEL 316.
- 2) OPERATING TEMPERATURE: -40°C TO +80°C.
- 3) STANDARD PART IDENTIFICATION TO INCLUDE PART NUMBER, DATE CODE AND WARNING MESSAGE.
- 4) GAS SPRING IS SUGGESTED TO BE MOUNTED SHAFT DOWN (ROD DOWN) FOR MAXIMUM PERFORMANCE.
- 5) GAS SPRINGS WILL BE SEALED IN CLEAR PLASTIC BAGS TO AVOID DAMAGE, DUST, OR OTHER FOREIGN OBJECTS.
- 6) GAS SPRING TO BE ASSEMBLED WITH END FITTINGS COMPLETELY FASTENED.

NORMONT	NAME	DATE	
	DRAWN DMA	05/06/2024	
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF NORMONT THIS DOCUMENT CONTAINS CONFIDENTIAL PROPRIETARY INFORMATION. THE REPRODUCTION, DISTRIBUTION, UTILISATION OR THE COMMUNICATION OF THIS DOCUMENT OR ANY PART THEREOF, WITHOUT EXPRESS AUTHORISATION IS STRICTLY FORBIDDEN.	CHECKED	REV	
	PART No. NSSG2550X350	-	
	TITLE STAINLESS STEEL GAS SPRING	SCALE	
REMOVE ALL BURRS AND BREAK ALL SHARP EDGES	TOLERANCES	THIRD ANGLE PROJECTION	NTS
	XX ± 0.060		
	X.XX ± 0.030	SIZE	
	X.XXX ± 0.010		C
	ANGLES ± 1°	SHEET 1 OF 1	
HOLES ± 0.005			
ALL DIMENSIONS ARE DUAL UNLESS OTHERWISE SPECIFIED			