
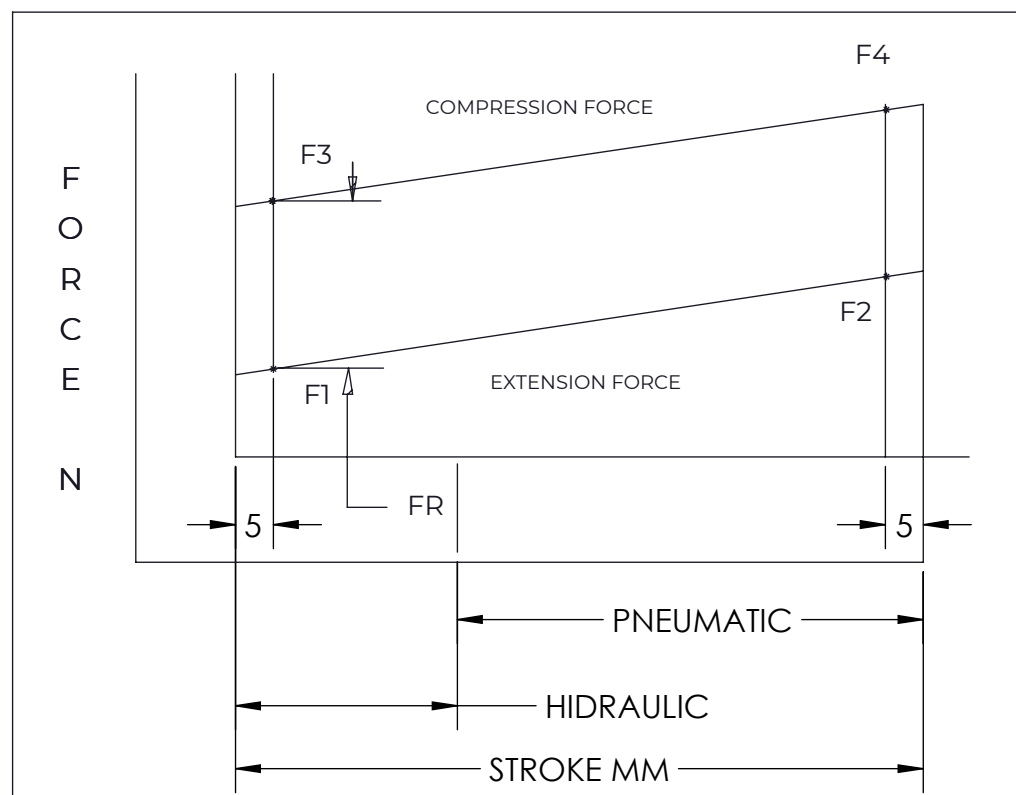


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED

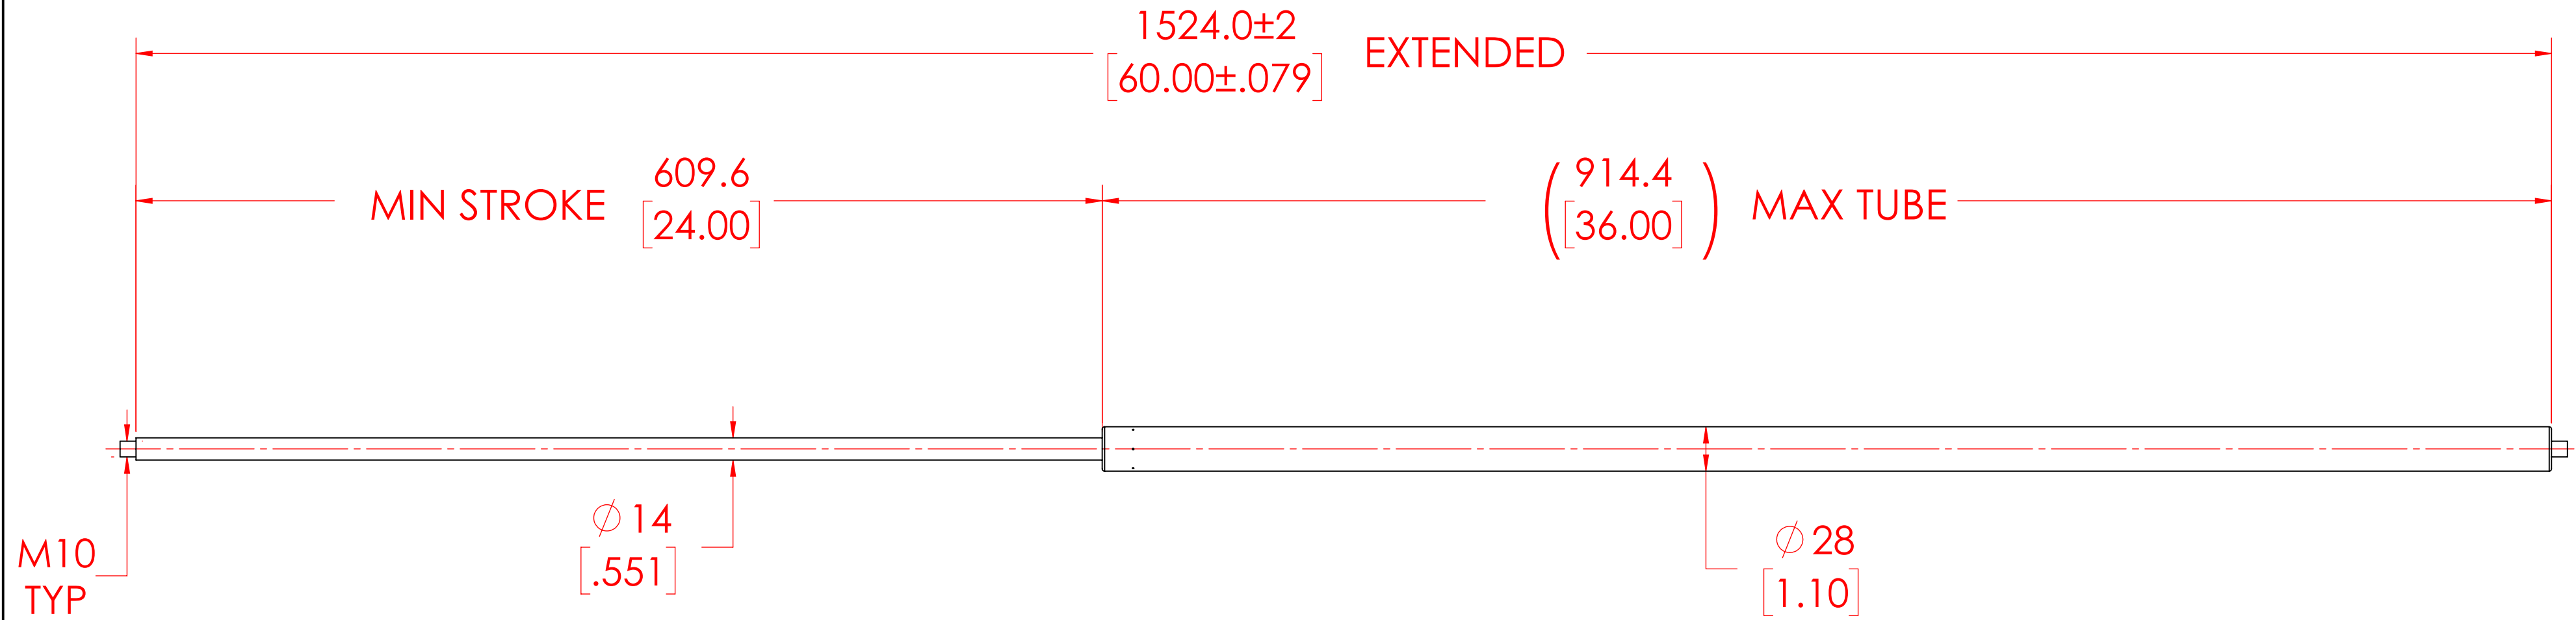

FORCES (STATICALLY MEASURED)	
F1	F2
400 LBS (1779 N) ^{+5%} _{-5%}	-

NOTES:

- 1) MATERIAL: CYLINDER - STAINLESS STEEL 316, NO PAINT / ROD - STAINLESS STEEL 316.
- 2) OPERATING TEMPERATURE: -40°C TO +80°C.
- 3) STANDARD PART IDENTIFICATION TO INCLUDE PART NUMBER, DATE CODE AND WARNING MESSAGE.
- 4) GAS SPRING IS SUGGESTED TO BE MOUNTED SHAFT DOWN (ROD DOWN) FOR MAXIMUM PERFORMANCE.
- 5) GAS SPRINGS WILL BE SEALED IN CLEAR PLASTIC BAGS TO AVOID DAMAGE, DUST, OR OTHER FOREIGN OBJECTS.
- 6) GAS SPRING TO BE ASSEMBLED WITH END FITTINGS COMPLETELY FASTENED.

NORMONT		NAME	DATE
		DRAWN DMA	05/06/2024
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF NORMONT THIS DOCUMENT CONTAINS CONFIDENTIAL PROPRIETARY INFORMATION. THE REPRODUCTION, DISTRIBUTION, UTILISATION OR THE COMMUNICATION OF THIS DOCUMENT OR ANY PART THEREOF, WITHOUT EXPRESS AUTHORISATION IS STRICTLY FORBIDDEN.		CHECKED	REV
		PART No. NSSG6000X400	-
REMOVE ALL BURRS AND BREAK ALL SHARP EDGES		TITLE STAINLESS STEEL GAS SPRING	SCALE
		TOLERANCES	THIRD ANGLE PROJECTION
ALL DIMENSIONS ARE DUAL UNLESS OTHERWISE SPECIFIED		XX ± 0.060	NTS
		X.XX ± 0.030	
SHEET 1 OF 1		X.XXX ± 0.010	SIZE
		ANGLES ± 1°	
SHEET 1 OF 1		HOLES ± 0.005	C