


| REVISION HISTORY | | | |
|------------------|-------------|------|----------|
| REV | DESCRIPTION | DATE | APPROVED |
| 1 | | | |
| 2 | | | |
| 3 | | | |

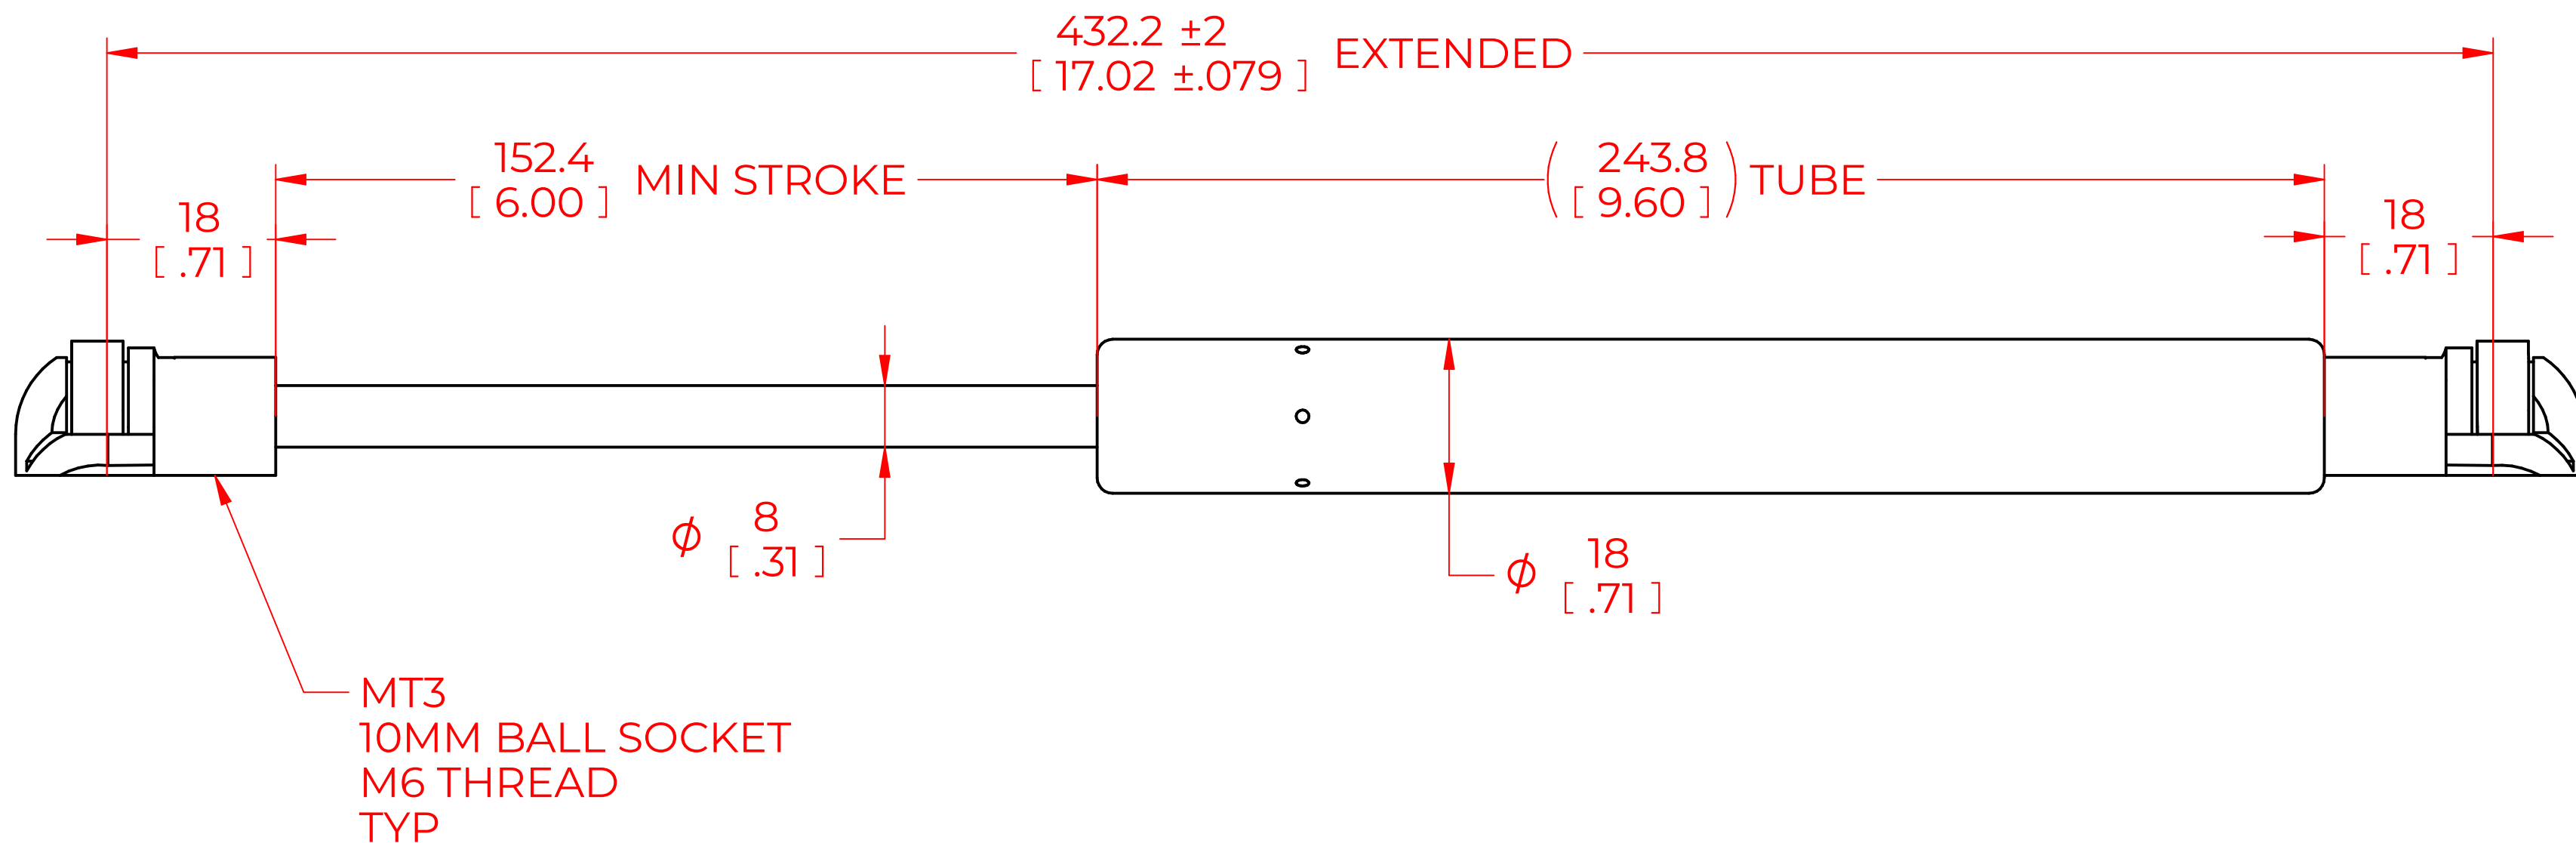

| DAMPENING SPECS | | |
|----------------------|-----------------------|----------------|
| DAMPENING TYPE | SPEED (40LBS OF LOAD) | MAX FORCE |
| MEDIUM/ EXTENSION | 2.3 "/s 58.42 mm/s | 60 LBS / 267 N |

- NOTES:
- 1) MATERIAL: CYLINDER - HEAVY GAUGE STEEL, BLACK PAINT. ROD - HARDENED STEEL BLACK NITRIDE.
 - 2) DIMENSIONS ASSUMING END CONNECTORS ARE FULLY FASTENED.
 - 3) DRAWING LENGTHS (NOT DIMENSIONED) OF CYLINDER AND ROD BODIES ARE NOT TO SCALE.
 - 4) OPERATING TEMPERATURE: -30°C TO +80°C.
 - 5) STANDARD LABEL TO INCLUDE PART NUMBER, DATE CODE AND WARNING MESSAGE. LABEL NOT TO BE REMOVED.
 - 6) DAMPER NOT TO BE CHANGED OR MODIFIED FROM ITS ORIGINAL MANUFACTURED INTENT.
 - 7) DAMPER IS SUGGESTED TO BE MOUNTED SHAFT DOWN (ROD DOWN) FOR MAXIMUM PERFORMANCE.
 - 8) IF APPLICABLE, CONNECTORS TO BE ORIENTED AS SHOWN ±5°.
 - 9) DAMPER WILL BE INDIVIDUALLY PACKED IN SEALED AND CLEAR PLASTIC BAGS TO AVOID DAMAGE, DUST, OR OTHER FOREIGN OBJECTS.
 - 10) DAMPER TO BE ASSEMBLED WITH END FITTINGS COMPLETELY FASTENED.
 - 11) DAMPERS ARE NOT TO BE OPENED.
 - 12) IF APPLICABLE, GREASE TO BE INCLUDED INSIDE THE BALL SOCKET OF THE END FITTINGS.

| NORMONT | | NAME | DATE | |
|--|--|---------------|-----------------------------------|------|
| DRAWN | | DMA | 11/25/2024 | |
| CHECKED | | | | |
| THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF NORMONT | | PART No. | REV | |
| THIS DOCUMENT CONTAINS CONFIDENTIAL PROPRIETARY INFORMATION. THE REPRODUCTION, DISTRIBUTION, UTILISATION OR THE COMMUNICATION OF THIS DOCUMENT OR ANY PART THEREOF, WITHOUT EXPRESS AUTHORISATION IS STRICTLY FORBIDDEN. | | NSDEM-6M-MT3 | | |
| | | TITLE | MEDIUM DAMPENING EXTENSION DAMPER | |
| | | TOLERANCES | SCALE | |
| | | X.X ± 0.060 | THIRD ANGLE PROJECTION | |
| | | X.XX ± 0.030 | | NTS |
| | | X.XXX ± 0.010 | | SIZE |
| REMOVE ALL BURRS AND BREAK ALL SHARP EDGES | | ANGLES ± 1° | C | |
| ALL DIMENSIONS ARE DUAL UNLESS OTHERWISE SPECIFIED | | HOLES ± 0.005 | | |
| | | SHEET 1 OF 1 | | |